


# EPDM Rubber expansion joint With changing installments lengths depending on the diameter



## Technical specifications:

It is suitable for compansion, vibration and shock absorption in the rigid tube system.

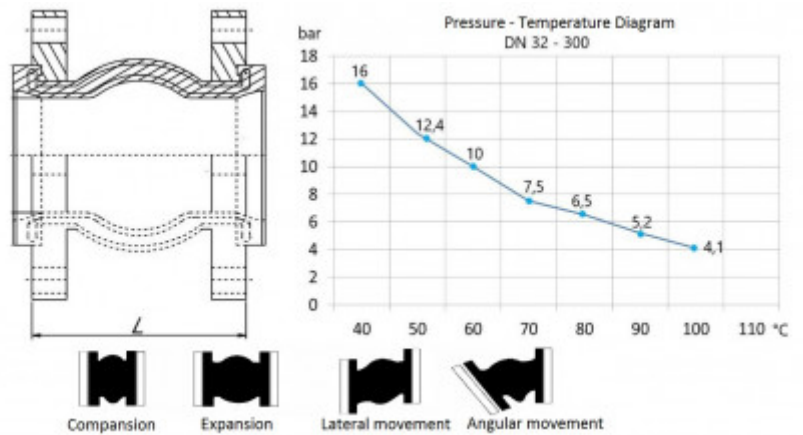

**Operating pressure:** 16 bar

**Heat resistance:** -10°C / +100°C

**Medium:** water

**Flanges:** PN 16

**Flanges material:** galvanized steel

**Material:** EPDM

Certain diameters are available from stock. Meantime, we hold the right of selling the stock in products.

DN	L (mm)	Compansion (mm)	Expansion (mm)	Lateral (mm)	Angular	Article number
32	95	8	4	8	15°	756148
40	95	8	4	8	15°	756146
50	105	8	4	8	15°	755128
65	115	12	6	10	15°	755146
80	130	12	10	12	15°	755145
100	135	18	10	12	15°	755122
125	170	18	10	12	15°	755235
150	180	18	10	12	15°	755123
200	205	20	14	18	15°	755069
250	240	22	14	18	15°	755052

DN	L (mm)	Compansion (mm)	Expansion (mm)	Lateral (mm)	Angular	Article number
300	260	24	14	18	15°	756012