


## AQUAPAL Water hose KTW and DVGW suitability

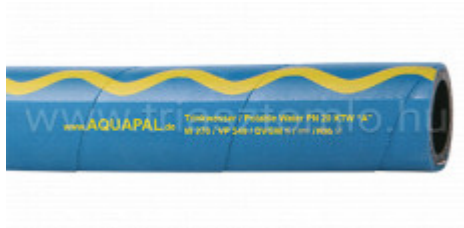

### Technical specifications:

It's an extremely flexible water hose for the transporting of cold and hot water. The hose is according to KTW "A" category and DVGW-W270 tested.

**Felirat:** AQUAPAL TRINKWASSERSCHLAUCH PN20 KTW "A" UND DVGW - W270 GEPRÜFT

**Operating pressure:** 20 bar

**Heat resistance:** -20°C / +90°C (for short time max. 130°C sterilizable)

**Interior:** special transparent interior layer, solvent free, smooth, entirely taste and odour free

**Exterior:** NBR, blue, fabric imprinted, UV fat and oil resistant

**Linings:** synthetic fabric

**Roll size:** 40 m

Just for order!

Belső Ø (mm)	Külső Ø (mm)	Súly (kg/m)	Cikkszám
19	27,4	0,42	3490 019000
25	34	0,57	3490 025000