


AQUAPAL Water hose KTW and DVGW suitability

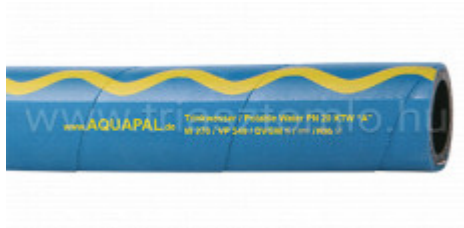

Technical specifications:

It's an extremely flexible water hose for the transporting of cold and hot water. The hose is according to KTW "A" category and DVGW-W270 tested.

Felirat: AQUAPAL TRINKWASSERSCHLAUCH PN20 KTW "A" UND DVGW - W270 GEPRÜFT

Operating pressure: 20 bar

Heat resistance: -20°C / +90°C (for short time max. 130°C sterilizable)

Interior: special transparent interior layer, solvent free, smooth, entirely taste and odour free

Exterior: NBR, blue, fabric imprinted, UV fat and oil resistant

Linings: synthetic fabric

Roll size: 40 m

Just for order!

| Belső Ø (mm) | Külső Ø (mm) | Súly (kg/m) | Cikkszám |
|--------------|--------------|-------------|-------------|
| 19 | 27,4 | 0,42 | 3490 019000 |
| 25 | 34 | 0,57 | 3490 025000 |