


CORRUFLEX Water suction hose, newly developed

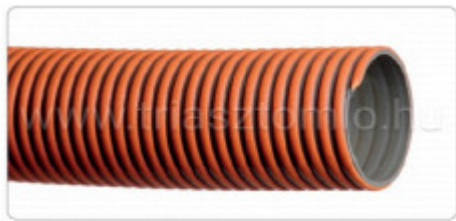

Technical specifications:

The hose is made of quality materials with a new structure. Even in cold, the hose is extremely flexible. It's suitable for industrial water, sewage, fertilizer. It's recommended for medium and heavy-duty.

Heat resistance: -15°C / +60°C

Interior: smooth, gray

Exterior: corrugated with orange spiral

Roll size: 50 m

Vacuum: -0,9 bar

Material: PVC

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Corruflex no static wire

Belső Ø (mm)	Külső Ø (mm)	Falvastagság (mm)	Súly (kg/m)	Üzemi nyomás 20°C-on (bar)	Tekercsméret (m)	Cikkszám
51	60	4,5	0,88	4,5	50	4433 050000
76	87	5,5	1,42	3,5	50	4433 075000
100	116	7	2,4	2,5	50	4433 100000
102	118	7	2,5	2,5	50	4433 102000
110	124	8	2,75	2,5	50	4433 110000

CORRUFLEX/AS A spirállal együtt futó rézszállal, mely által a tömlő leföldelhető

Belső Ø (mm)	Külső Ø (mm)	Falvastagság (mm)	Súly (kg/m)	Üzemi nyomás 20°C-on (bar)	Tekercsméret (m)	Cikkszám
51	60	4,5	0,96	2	50	4456 050000
76	87	5,5	1,6	2	50	4456 075000
102	116	7	2,7	2	50	4456 100000
127	142	7,5	3,45	2	30	4456 125000
152	168	8	4,6	2	30	4456 150000



TRIÁSZ-TÖMLŐ KFT.

