

## **KALIVENTIL CP HiTex 481 Suction hose Heat resistant, up to 600 °C**



### **Technical specifications:**

#### **APPLICATIONS**

- flexible hose/ ducting for hot and cold gases
- vehicle gas exhaust system, car gas extraction: hose reel, slotted floor channel, underfloor extraction system
- engine test bench, exhaust gas measurement
- high temperature extraction: oven, foundry, furnace, smelting, ceramics industry, glass industry, steel plant, aluminium mill
- bellows, compensators

#### **PROPERTIES**

- very good resistance to flying sparks and welding sparks
- abrasion protection via external clamp profile
- secure clamping of the wall within the clamp profile
- very good heat resistance
- conforms to RoHS guideline
- REACH according to --> Technology / Technical Information / REACH

#### **TEMPERATURE RANGE**

- -60°C to 600°C
- short time to 700°C

#### **DELIVERY VARIANTS**

- further diameters and lengths available on request

#### **DESIGN**

- CP construction
- clamp profile supporting spiral: all-stainless steel (INOX)
- double-layer wall
- wall: stainless steel wire reinforced and special coated glass fabric

**Heat resistance:** -60°C / +600°C (for short time +700°C)

**Structure:** heat resistant multilayered fabric

**Interior:** gray

**Exterior:** gray with exterior steel spiral

**Roll size:** 3 and 6 m – it can be manufactured with different lengths

**Standard:** DIN 4102-B1


Will be manufactured with short delivery time. MOQ 3 m

Inside diameter (mm)	Weight Kg/m	Bending radius (mm)	Vacuum (bar)	Article number
80	1,93	45	-0,25	481-0080-0000



TRIÁSZ-TÖMLŐ KFT.

Inside diameter (mm)	Weight Kg/m	Bending radius (mm)	Vacuum (bar)	Article number
100/102	2,1	53	-0,15	481-0100-0000
150/152	2,11	73	-0,06	481-0150-0000
200/203	2,79	93	-0,04	481-0200-0000

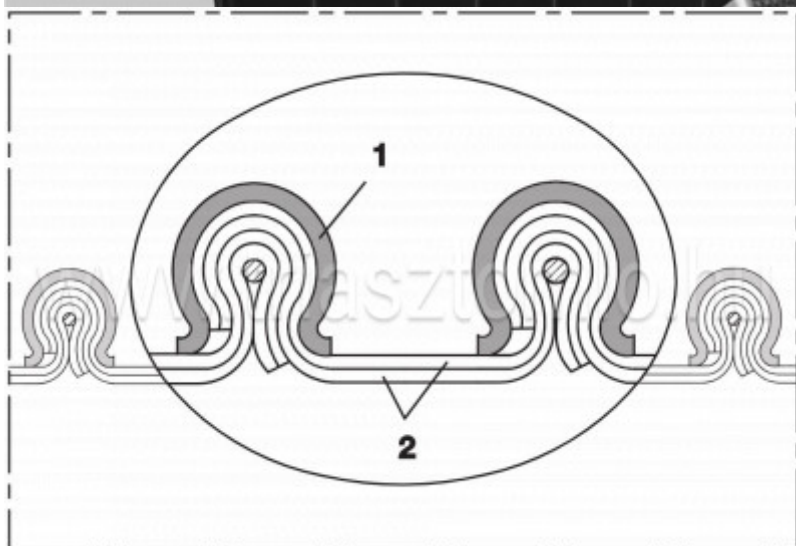



TRIÁSZ-TÖMLŐ KFT.

