

## PROTAPE TPE 326 MEMORY - Crush resistant exhaust gas hose



### Technical specifications:

Applications: flexible hose/ ducting for hot gases vehicle gas exhaust system, car gas extraction: hose reel, slotted floor channel, underfloor extraction system engine test bench, exhaust gas measurement

Properties fabric reinforced highly flexible + compressible protected, flow-optimizing exterior folds vibration resistant crush resistant good resistance to chemicals conforms to RoHS guideline REACH according to --> Technology / Technical Information / REACH

Temperature Range exhaust gas temperatures to 200°C \* \* when correctly applied with exhaust gas funnels and sufficient fresh air supply (50% approx.).

Design patented PROTAPE® tape hose special plastic-profile supporting spiral fabric-reinforced tape wall: EPDM/ PP coated fabric wall thickness 0,4 mm approx.

Delivery variants further diameters and lengths available on request black (standard) special colours: coloured spiral customer-specific branding


Accessories: Bridge clamp types: 217, 213, 212

On stock at the manufacturer, short delivery time with regular shipments

Inner diameter (mm)	Outer diameter (mm)	Vacuum (bar)	Bending radius (mm)	Weight (kg/m)	Stock coil lengths (m)	Manufacturing lengths (m)	Article Nr.
50-51	68	-0,4	48	0,38	nem mindig van raktáron	10;15	326-0051-0000
63-65	80	-0,28	53	0,48	nem mindig van raktáron	10;15	326-0063-0000
75-76	93	-0,17	60	0,54	10; 15	5; 6; 7,5; 12,5	326-0076-0000
100-102	119	-0,05	71	0,71	5; 7,5; 10; 15	6; 12,5	326-0102-0000
125-127	144	-0,035	100	0,87	10; 15	5; 6; 7,5; 12,5	326-0127-0000
150-152	169	-0,03	110	1,04	10; 15	5; 6; 7,5; 12,5	326-0152-0000
200-203	220	-0,01	155	1,37	nem mindig van raktáron	5; 6; 7,5; 10; 12,5	326-0203-0000



TRIÁSZ-TÖMLŐ KFT.

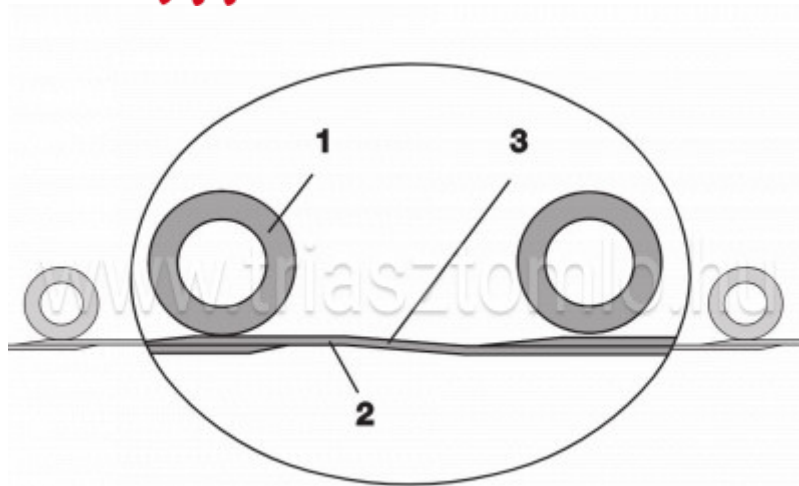

Accessories



CONNECT 226



CLAMP 217



CONNECT 270-271



CLAMP 213



CLAMP 212