


Purflex / SWEEP Medium strong, polyurethane suction/discharge hose, FDA

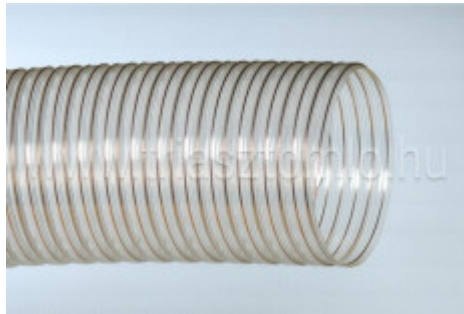

Technical specifications:

It is a transplant polyurethane spiral hose with static-wire. The hose has good abrasion resistance and it is longitudinally flexible. It is suitable for different abrasive materials, granule and for food and other industrial use.

It works well as suction hose for cleaning trucks.

Standards: EG 1935/2004; EU Food industry standard 10/2011

(For request, it is also available in 20 m long rolls over 160 mm.)

Other diameters are available for request.

Felirat: Polyurethane H – EU 10/2011 – FDA – DN* – *manufacturer numbe*

Heat resistance: -40°C / +90°C (for short time +125°C)

Structure: polyurethane, transparent, embedded steel wire helix, nearly smooth interior, corrugated exterior

Wall thickness: 1,1 mm between the spirals

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside Ø (mm)	Vacuum (bar)	Bending radius (mm)	Pressure on 20°C (bar)	Weight (kg/m)	Roll size (m)	Article number
150	-0,12	200	0,48	1,8	10	231031
160	-0,1	211	0,42	1,96	10	231032
200	-0,06	264	0,3	2,62	10	231033
225	-0,05	280	0,26	3,25	10	231089
250	-0,05	325	0,24	3,13	10	231034



TRIÁSZ-TÖMLŐ KFT.

