


## Rubber expansion joint PN16 EPDM PN16 with flange, 130 mm installation length - COPY



### Technical specifications:

It is suitable for compansion, vibration and shock absorption in the rigid tube system.

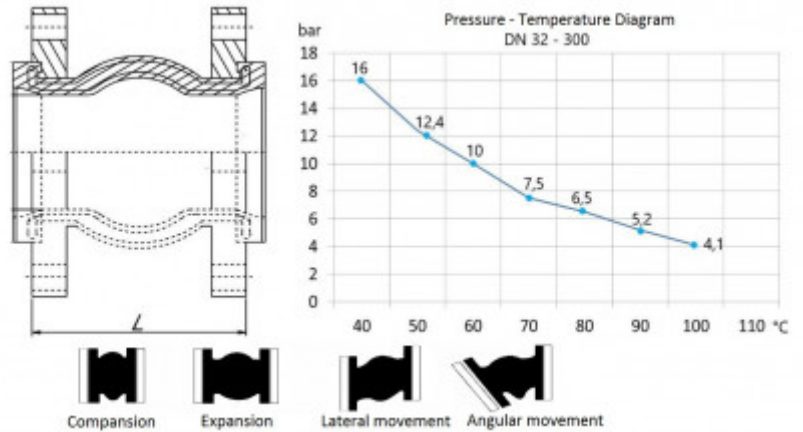

**Heat resistance:** -10°C / +100°C

**Installation length:** 130 mm

**Material:** EPDM

**Medium:** water

**Flanges:** from DN 32 to DN 150 PN 10/16, from DN 200 to DN 300 PN10 (according to EN1092)

**Flange material:** 316

On stock at the manufacturer, short delivery time with regular shipments

| DN  | Összenyomás (mm) | Nyúlás (m) | Laterális (mm) | Anguláris | Üzemi nyomás (bar) | Cikkszám |
|-----|------------------|------------|----------------|-----------|--------------------|----------|
| 40  | 8                | 4          | 8              | 15°       | 16                 | 756042   |
| 50  | 8                | 4          | 8              | 15°       | 16                 | 755301   |
| 65  | 12               | 6          | 10             | 15°       | 16                 | 755302   |
| 80  | 12               | 6          | 10             | 15°       | 16                 | 756043   |
| 100 | 12               | 10         | 12             | 15°       | 16                 | 756044   |
| 125 | 16               | 10         | 12             | 15°       | 16                 | 755303   |
| 150 | 16               | 10         | 12             | 15°       | 10                 | 756045   |
| 200 | 20               | 14         | 18             | 15°       | 10                 | 756046   |