

## VENTIFLON 250 inox food Solvent and heat-resistant PTFE spiral suction hose



### Technical specifications:

The suction hose is flexible, chemical and solvent resistant. It's suitable for gases and steam. The hose is thin-walled, lightweight, flexible with steel helix reinforcement. It does not apply for solid materials transportation.

Other diameters can be ordered up to DN 900!

**Heat resistance:** -150°C / +250°C ( for short time +270°C)

**Structure:** glass fibre reinforced teflon foil

**Interior:** beige, teflon

**Exterior:** beige, teflon, exterior steel wire helix

**Roll size:** 3-6 m – it can be manufactured with other lengths

**Standard:** EU Food quality standard, 10/2011 and EC 1935/2004, FDA 21 CFR 177.1550, German standard XV BfR


**Szakadási nyúlás:** 10/2011 és EC 1935/2004, FDA 21 CFR 177.1550, Német irányelv XV BfR

Will be manufactured with short delivery time. MOQ 3 m

| Inside diameter (mm) | Weight (kg/m) | Bending radius (mm) | Vacuum (bar) | Article Nr.   |
|----------------------|---------------|---------------------|--------------|---------------|
| 50                   | 0,57          | 18                  | -0,27        | 475-0050-0000 |
| 60                   | 0,64          | 20                  | -0,22        | 475-0060-0000 |
| 65                   | 0,72          | 22                  | -0,2         | 475-0065-0000 |
| 75                   | 0,82          | 24                  | -0,16        | 475-0075-0000 |
| 80                   | 0,88          | 24                  | -0,14        | 475-0080-0000 |
| 90                   | 0,98          | 26                  | -0,1         | 475-0090-0000 |
| 102                  | 0,82          | 28                  | -0,085       | 475-0100-0000 |
| 120                  | 0,98          | 32                  | -0,065       | 475-0120-0000 |
| 152                  | 0,76          | 38                  | -0,035       | 475-0150-0000 |
| 160                  | 0,81          | 40                  | -0,03        | 475-0160-0000 |
| 175                  | 0,88          | 44                  | -0,03        | 475-0175-0000 |
| 180                  | 0,9           | 44                  | -0,025       | 475-0180-0000 |
| 203                  | 1             | 48                  | -0,02        | 475-0200-0000 |
| 300                  | 1,48          | 68                  | -0,055       | 475-0300-0000 |
| 305                  | 1,51          | 69                  | -0,055       | 475-0305-0000 |



TRIÁSZ-TÖMLŐ KFT.

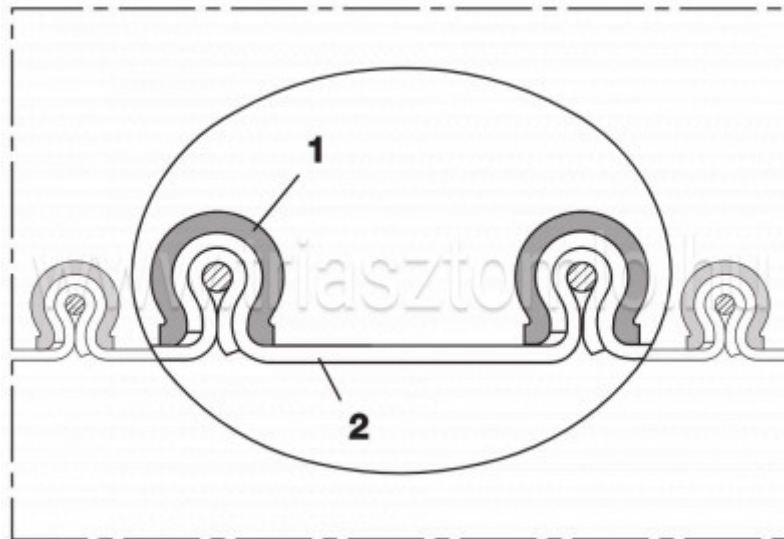

www.triasztomlo.hu