

## VENTIFLON 250 inox food Solvent and heat-resistant PTFE spiral suction hose



### Technical specifications:

The suction hose is flexible, chemical and solvent resistant. It's suitable for gases and steam. The hose is thin-walled, lightweight, flexible with steel helix reinforcement. It does not apply for solid materials transportation.

Other diameters can be ordered up to DN 900!

**Heat resistance:** -150°C / +250°C ( for short time +270°C)

**Structure:** glass fibre reinforced teflon foil

**Interior:** beige, teflon

**Exterior:** beige, teflon, exterior steel wire helix

**Roll size:** 3-6 m – it can be manufactured with other lengths

**Standard:** EU Food quality standard, 10/2011 and EC 1935/2004, FDA 21 CFR 177.1550, German standard XV BfR


**Szakadási nyúlás:** 10/2011 és EC 1935/2004, FDA 21 CFR 177.1550, Német irányelv XV BfR

Will be manufactured with short delivery time. MOQ 3 m

Inside diameter (mm)	Weight (kg/m)	Bending radius (mm)	Vacuum (bar)	Article Nr.
50	0,57	18	-0,27	475-0050-0000
60	0,64	20	-0,22	475-0060-0000
65	0,72	22	-0,2	475-0065-0000
75	0,82	24	-0,16	475-0075-0000
80	0,88	24	-0,14	475-0080-0000
90	0,98	26	-0,1	475-0090-0000
102	0,82	28	-0,085	475-0100-0000
120	0,98	32	-0,065	475-0120-0000
152	0,76	38	-0,035	475-0150-0000
160	0,81	40	-0,03	475-0160-0000
175	0,88	44	-0,03	475-0175-0000
180	0,9	44	-0,025	475-0180-0000
203	1	48	-0,02	475-0200-0000
300	1,48	68	-0,055	475-0300-0000
305	1,51	69	-0,055	475-0305-0000



TRIASZ-TÖMLŐ KFT.

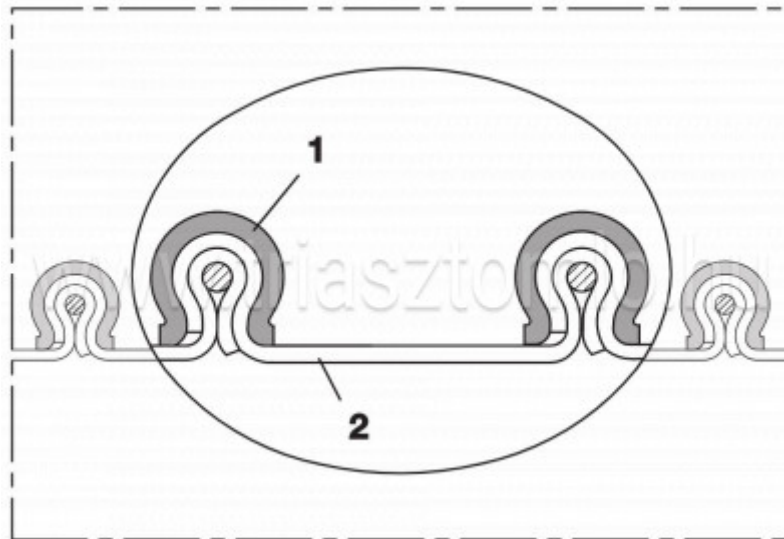

www.triasztomlo.hu