


CARBOCORD®/10

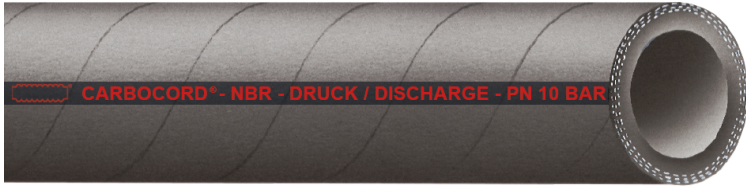

Oil and petrol delivery hose
which is suitable for multi purposes.

Marking: Carbocord® - NBR - Druck / Discharge - PN 10 bar - Ω

Norm	EN ISO 1307:2008	Compound tube	NBR
Working pressure	10 bar	Construction tube	Smooth
Bursting pressure	30 bar	Color tube	Black
Min. temperature	-40 °C	Compound cover	SBR/EPDM
Max. temperature	+90 °C	Cover	Fabric finish
Max. temperature oil	+100 °C	Color cover	Black
Electr. resistance tube	Electrical conductive <math><10^6 \Omega</math>	Resistance tube	Oil resistant, Petrol resistant
Electr. resistance cover	Antistatic <math><10^9 \Omega</math>	Aromatic content maximum	50 %
Electr. resistance tube to cover	Antistatic <math><10^9 \Omega</math>	Reinforcements	Textile plies

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
3310032000	32,0	6,0	44,0	210	1,000	40
3310038000	38,0	6,5	51,0	300	1,280	40
3310050000	50,0	7,0	64,0	400	1,750	40

Application: The hose is often used during the loading and unloading of unleaded fuels with a maximum aromatic content up to 50% in fuel tanks and ships. Suitable for industrial oils, biodiesel, fuels oils and mineral based hydraulic oils.

Remark:

- Cutted length possible

We recommend assembly with

5537
TW hose couplings



5572
TW couplings



5560
Safety clamps

