


HEDUFLEX®

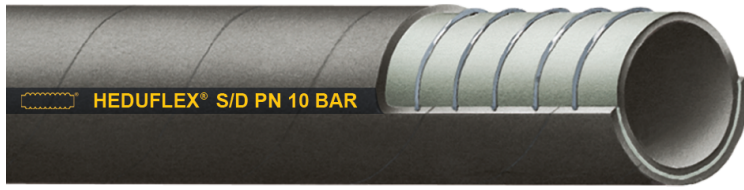

Rubber suction and discharge hose
for drainage water, dung and with limited lye and acid resistance.

Marking: Heduflex® S/D PN 10 bar (203/254/305 MM PN 6 bar)

Norm	EN ISO 1307:2008	Color tube	Black
Vacuum	0,90 bar	Compound cover	SBR
Min. temperature	-30 °C	Cover	Fabric finish
Max. temperature	+80 °C	Color cover	Black
Compound tube	SBR	Reinforcements	Steel spiral, Textile plies
Construction tube	Smooth		

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	WP (bar)	BP (bar)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
3640019000	19,0	5,5	30,0	10	30	95	0,680	40
3640025000	25,0	5,0	35,0	10	30	125	0,810	40
3640032000	32,0	5,5	43,0	10	30	160	1,000	40
3640038000	38,0	6,0	50,0	10	30	190	1,300	40
3640040000	40,0	6,0	52,0	10	30	200	1,350	40
3640050000	51,0	6,5	64,0	10	30	210	1,740	40
3640060000	60,0	6,5	73,0	10	30	240	2,260	40
3640063000	63,0	8,0	79,0	10	30	260	2,500	40
3640075000	76,0	7,0	90,0	10	30	310	2,920	20/40
3640080000	80,0	7,5	95,0	10	30	320	3,300	40
3640090000	90,0	7,5	105,0	10	30	360	3,670	40
3640100000	102,0	7,0	116,0	10	30	410	3,960	10/20/40
3640110000	110,0	8,0	126,0	10	30	440	4,900	20
3640125000	127,0	8,5	144,0	10	30	510	6,000	20
3640150000	152,0	9,0	170,0	10	30	760	7,950	20
3640200000	203,0	10,5	224,0	6	18	1015	12,600	5/6
3640250000	254,0	10,5	275,0	6	18	1270	16,500	5/6
3640300000	305,0	10,5	326,0	6	18	1830	21,500	3/5

Application: High-quality rubber hose. One of the bestselling products for heavy duty industrial applications, agriculture, construction, infrastructure and gardening. Hose is also very widely used on the suction side of pumps, where the thick wall strength, robust construction and wear-resistant cover contribute to a very long life time of this hose. Other dimensions can be produced on request.

Remark:

- Cutted length possible (ID 203/254/305 excluded)
- ID 203/254/305 with spiral free cuffs

We recommend assembly with

5721
Perrot couplings



5710
Bauer couplings



6202
Mikalor Supra - clamps

