


GOLDSCHLANGE®

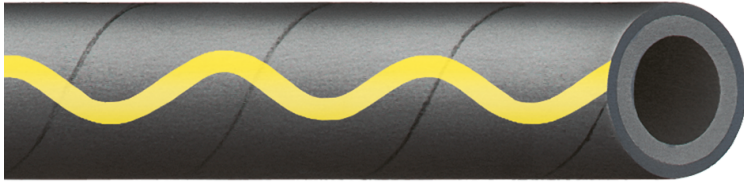

EPDM water hose

for heavy duty applications. Kink and impact resistant. It is allowed to drive over the hose.

Norm	EN ISO 1307:2008	Color tube	Black
Min. temperature	-30 °C	Compound cover	CR
Max. temperature	+100 °C	Cover	Fabric finish
Max. temperature steam cleaning	+130 °C	Color cover	Black
Max. cleaning time with steam	30 minutes without pressure	Resistance cover	Abrasion resistant, Ageing resistant, Oil resistant, Ozone resistant, UV resistant, Weather resistant
Compound tube	EPDM	Reinforcements	Textile plies
Construction tube	Smooth		

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	WP (bar)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
3026013000	13,0	3,9	20,8	30	50	0,225	40
3026019000	19,0	4,4	27,8	25	80	0,385	40
3026025000	25,0	4,5	34,0	20	160	0,490	40

Application: This high-quality water and cleaning hose is a brand product of the highest quality. A tool which is considered superior because it is robust, nearly indestructible, durable and very versatile. GOLDSCHLANGE® is the right hose for demanding applications. A product that can handle all challenges. Whether on the construction site, in the field or on machines, devices or in containers.

Remark:

- Cutted length not possible

We recommend assembly with

5310
Geka® couplings



5354
Geka® nozzle



6060
ABA clamps

