


## SILOCORD®/SPEZIAL/SP

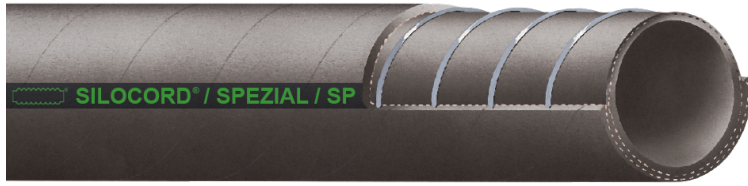

**Dry cargo suction and discharge hose, heavy duty**  
with extremely abrasive resistant tube.

Marking: Silocord® / Spezial / SP für Splitt - Soda - Quarzsand - PN 10 bar - M

Norm	EN ISO 1307:2008	Compound tube	NR
Working pressure	10 bar	Abrasion value tube	70 mm <sup>3</sup>
Bursting pressure	30 bar	Construction tube	Smooth
Vacuum	0,80 bar	Color tube	Black
Min. temperature	-30 °C	Compound cover	CR
Max. temperature	+80 °C	Cover	Fabric finish
Electr. resistance tube	Electrical conductive <10 <sup>6</sup> Ω	Color cover	Black
Electr. resistance cover	Electrical conductive <10 <sup>6</sup> Ω	Reinforcements	2 Static wires, Steel spiral, Textile plies

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
3544076098	76,0	11,0	98,0	310	4,070	40
3544102126	102,0	12,0	126,0	410	5,900	20
3544152173	152,0	10,5	173,0	760	8,990	20

**Application:** Very wear resistant and notch resistant silo hose with steel spiral that can be used for filling and unloading silos and is extremely suitable for highly abrasive materials such as split, soda, quartz sand, etc. Hose has an extra thick wear resistant tube which gives it a very good lifespan in heavy applications. Hose has a double safety as the static electricity is discharged through the cross braided static wires and the rubber itself also has conductive properties.

**Remark:**

- Cutted length possible
- At assembly connect both static wires

**We recommend assembly with**

5123  
Storz couplings



5611  
Swiveling flange



5560  
Safety clamps

