


## Swiveling flange

For safety clamp and hose clamp assembly

Norm	DIN 2817 / EN 1092-1
Material	Zinc plated steel

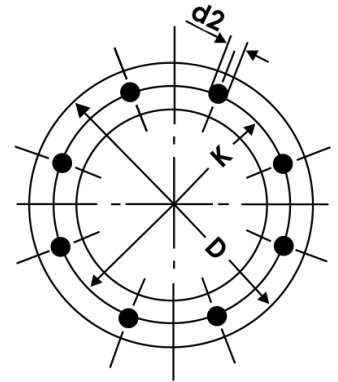

Art.-no.	For hose Ø inner (mm)	Bore PN	Flange DN	Flange outside diameter	Pitch circle (K)	Number of holes	Bore diameter (d2)	Weight (kg/pce)
5611019019	19	PN 40	20	105	75	4	14	1,226
5611025025	25	PN 40	25	115	85	4	14	1,505
5611032032	32	PN 40	32	140	100	4	18	2,363
5611038038	38	PN 40	40	150	110	4	18	2,780
5611050050	51	PN 16	50	165	125	4	18	3,698
5611063063	63	PN 16	65	185	145	8	18	4,497
5611075075	76	PN 16	80	200	160	8	18	5,520
5611100100	100	PN 16	100	220	180	8	18	6,644
5611102102	102	PN 16	100	220	180	8	18	6,732
5611125125	125	PN 16	125	250	210	8	18	9,298
5611150150	152	PN 16	150	285	240	8	22	13,148
5611200200	203	PN 10	200	340	295	8	22	21,862
5611250250	254	PN 10	250	395	350	12	22	25,200
5611300300	305	PN 10	300	445	400	12	22	34,632

**Remark:**

- Flanges DN 250 and DN 300 suitable only for hose clamp assembly
- Flanges DN 19 and DN 25 suitable only for safety clamp assembly

